


Tuyaux HDPE, fiche technique

Tuyaux en PE-dur SN2 et SN4, avec emboîtement et joint

Conformes aux normes : EN 12666 - R 592012 - Qplus 11004

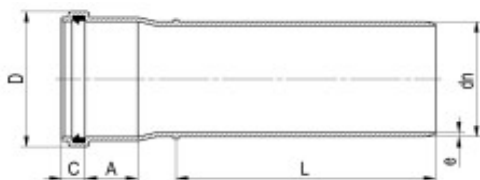

SN4 / SDR26 / S12.5 Couleur noir

dn mm	e mm	D mm	C mm	A mm	L mm	Poids kg/m	Palette m	Article N°
110	4.2	138.4	24.7	83.9	6'000	1.470	270	S12PET1106
125	4.8	153.8	24.7	85.0	6'000	1.900	192	S12PET1256
160	6.2	199.4	31.0	89.0	6'000	3.150	108	S12PET1606
200	7.7	231.9	36.7	93.0	6'000	4.840	90	S12PET2006
250	9.6	293.0	56.0	97.0	6'000	7.850	48	S12PET2506
250	9.6	293.0	56.0	97.0	10'000	7.630	80	S12PET25010
315	12.1	363.6	63.0	104.0	6'000	12.420	36	S12PET3156
315	12.1	363.6	63.0	104.0	10'000	10.090	60	S12PET31510
355	13.6	406.0	59.0	221.0	6'000	15.440	36	S12PET3556
355	13.6	406.0	59.0	221.0	10'000	15.100	60	S12PET35510
400	15.3	433.9	71.0	118.0	6'000	19.610	24	S12PET4006
400	15.3	433.9	71.0	118.0	10'000	19.200	40	S12PET40010

SN2 / SDR33 / S16 Couleur noir

dn mm	e mm	D mm	C mm	A mm	L mm	Poids kg/m	Palette m	Article N°
200	6.2	231.9	36.7	93.0	6'000	3.990	90	S16PET2006
250	7.7	293.0	56.0	97.0	6'000	6.470	48	S16PET2506
250	7.7	293.0	56.0	97.0	10'000	6.250	80	S16PET25010
315	9.7	363.6	63.0	104.0	6'000	10.190	36	S16PET3156
315	9.7	363.6	63.0	104.0	10'000	9.860	60	S16PET31510
355	10.9	406.0	59.0	221.0	6'000	12.640	36	S16PET3556
355	10.9	406.0	59.0	221.0	10'000	12.300	60	S16PET35510
400	12.3	433.9	71.0	118.0	6'000	16.110	24	S16PET4006
400	12.3	433.9	71.0	118.0	10'000	15.700	40	S16PET40010

Valeurs indicatives, informatives et non contractuelles.