


Manchons doubles HDPE, fiche technique

Manchons doubles en PE-dur, avec emboîtement et joint

Conformes aux normes : EN 12666 - R 592012 / Qplus 11004 / SKZ-Ü

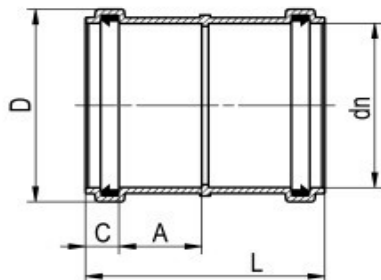

¹ S12,5

* Pièce façonnée

SN2 / SDR33 / S16 - SN4 / S12.5 / SDR26 Couleur : noir

| dn mm | D mm | C mm | A mm | L mm | Poids kg | Carton P. | Palette P. | Article N° |
|------------------|---------|---------|---------|---------|-------------|--------------|---------------|---------------|
| ¹ 110 | 138.2 | 24.7 | 91.8 | 235.0 | 0.605 | 42 | 168 | S16PEMCC110 |
| ¹ 125 | 153.6 | 24.7 | 94.8 | 242.0 | 0.836 | 31 | 124 | S16PEMCC125 |
| ¹ 160 | 199.4 | 31.0 | 101.0 | 268.0 | 1.473 | 19 | 76 | S16PEMCC160 |
| 200 | 231.9 | 36.7 | 103.8 | 286.0 | 2.160 | 7 | 28 | S16PEMCC200 |
| 250 | 293.0 | 56.0 | 174.5 | 467.0 | 3.900 | 1 | 22 | S16PEMC250 |
| 315 | 363.6 | 63.0 | 199.0 | 530.0 | 6.935 | 1 | 12 | S16PEMC315 |
| *355 | 411.8 | 59.0 | 221.0 | 560.0 | 11.000 | 1 | 25 | S16PEMC355 |
| 400 | 461.2 | 71.0 | 118.0 | 388.0 | 8.900 | 1 | 25 | S16PEMC400 |
| *450 | 500.0 | 58.3 | 129.2 | 390.0 | 13.600 | | | S16PEMC450 |
| *500 | 560.0 | 139.0 | 139.0 | 423.0 | 19.200 | | | S16PEMC500 |
| *630 | 710.0 | 167.5 | 167.5 | 480.0 | 39.000 | | | S16PEMC630 |

Valeurs indicatives, informatives et non contractuelles.