


Collets HDPE, fiche technique

Collets courts en PE-dur, uniquement pour soudure au miroir

Conformes aux normes : EN 12666 - R 592012 - Qplus 11004

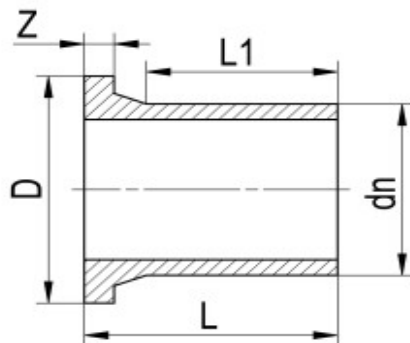

SN4 Couleur : noir

dn mm	D mm	L1 mm	Z mm	L mm	Poids kg	Article N°
110	158.0	37.0	18.0	83.0	0.300	S16PECOS110
125	158.0	44.0	18.0	87.0	0.300	S16PECOS125
160	212.0	43.0	18.0	95.0	0.500	S16PECOS160
200	268.0	60.0	18.0	121.0	1.200	S16PECOS200
250	320.0	60.0	20.0	119.0	1.600	S16PECOS250
315	370.0	86.0	20.0	165.0	2.100	S16PECOS315
355	430.0	100.0	23.0	180.0	6.000	S16PECOS355
400	482.0	100.0	26.0	195.0	4.200	S16PECOS400
450	585.0	60.0	33.0	139.0	7.400	S16PECOS450
500	585.0	60.0	38.0	138.0	6.200	S16PECOS500
630	685.0	80.0	40.0	142.0	7.400	S16PECOS630


Autres dimensions sur demande

Valeurs indicatives, informatives et non contractuelles.

Brides libres PP, fiche technique

Brides libres en PP avec noyau en acier

Conformes aux normes : EN 12201.

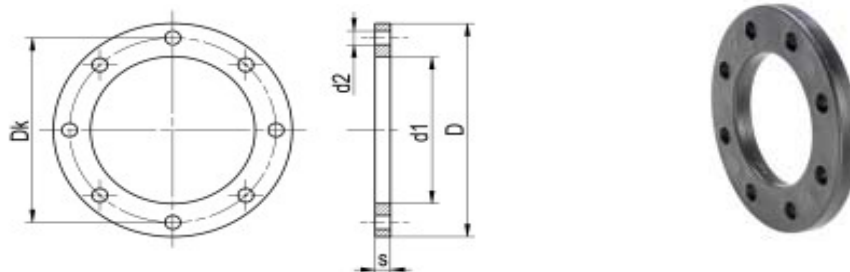

S8 / SDR17 - S5 / SDR11

dn mm	D mm	Perçage Nombre	d2 mm	Boulon u.	Poids kg	Article N°
110		8.0	18.0	M 16	1.407	S8PEBRL110
125		8.0	18.0	M 16	1.408	S8PEBRL125
160		8.0	22.0	M 20	3.491	S8PEBRL160
200	340.0	8.0	22.0	M 20	5.600	S8PEBRL200
250	395.0	12.0	22.0	M 20	6.632	S8PEBRL250
315	445.0	12.0	22.0	M 20	7.903	S8PEBRL315
355	512.0	16.0	22.0	M 20	14.587	S8PEBRL355
400	565.0	16.0	26.0	M24	20.034	S8PEBRL400
450					22.600	S8PEBRL450
500					21.061	S8PEBRL500
630					31.600	S8PEBRL630


Autres dimensions sur demande

Valeurs indicatives, informatives et non contractuelles.

Jointes plats pour brides, fiche technique

Jointes de bride profilé avec insert en acier type G-ST-P / K

Acier ST37

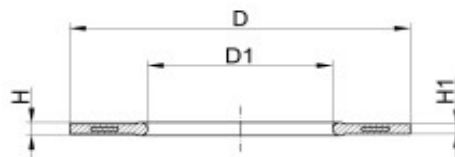

S8 / SDR17 - S5 / SDR11

dn mm	D mm	D1 mm	H mm	H1 mm	Poids kg	Article N°
110	162.0	104.0	6.0	5.0	0.096	S8JPB110
125	162.0	123.0	6.0	5.0	0.073	S8JPB125
160	218.0	160.0	8.0	6.0	0.145	S8JPB160
200	273.0	203.0	8.0	6.0	0.286	S8JPB200
250	328.0	252.0	8.0	6.0	0.355	S8JPB250
315	378.0	306.0	8.0	6.0	0.419	S8JPB315
355	438.0	355.0	10.0	7.0	0.645	S8JPB355
400	489.0	400.0	10.0	7.0	0.819	S8JPB400
450	594.0	403.0	10.0	7.0	1.885	S8JPB450
500	594.0	447.0	10.0	7.0	1.618	S8JPB500

Autres dimensions sur demande

Valeurs indicatives, informatives et non contractuelles.