


## Réductions HDPE, fiche technique

### Réductions en PE-dur, avec emboîtement et joint

Conformes aux normes : EN 12666 - R 592012 - Qplus 11004 - SKZ-Ü

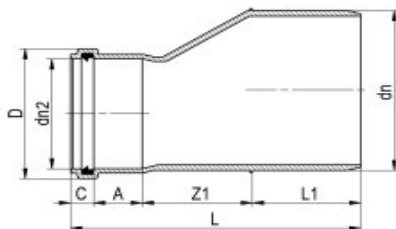

<sup>1</sup> S12,5

\* Pièce façonnée

**SN2 / SDR33 / S16 - SN4 / S12.5 / SDR26** Couleur : noir

dn mm	dn2 mm	D mm	C mm	A mm	L1 mm	Z1 mm	L mm	Poids kg	Carton P.	Palette P.	Article N°
<sup>1</sup> 125	110	138.4	24.7	83.9	117.5	50.9	277.0	0.633	35	140	S16PER125110
<sup>1</sup> 160	110	138.4	24.7	83.9	134.0	104.2	346.8	1.154	27	108	S16PER160110
<sup>1</sup> 160	125	153.8	24.7	85.0	134.0	81.3	325.5	0.915	20	80	S16PER160125
200	110	138.4	24.7	83.9	143.0	173.9	425.5	1.637	12	48	S16PER200110
200	125	153.8	24.7	85.0	143.0	151.2	403.9	1.776	12	48	S16PER200125
200	160	199.4	31.0	89.0	143.0	90.7	353.7	1.878	12	48	S16PER200160
*250	200	231.9	36.7	93.0	200.0	205.0	535.0	2.500			S16PER250200
*315	200	231.9	36.7	93.0	200.0	170.0	500.0	3.100			S16PER315200
*315	250	293.0	56.0	97.0	200.0	370.0	723.0	5.300			S16PER315250
*355	315	363.6	63.0	104.0	280.0	243.0	680.0	8.700			S16PER400250
*400	355	406.0	59.0	221.0	280.0	155.0	715.0	12.800			S16PER400315

Valeurs indicatives, informatives et non contractuelles.