


Réductions PP-HM, fiche technique

Réductions en polypropylène à haut module d'élasticité, avec emboîtement et joint

Conformes aux normes : EN 1852 - R 592012 - Qplus 15009

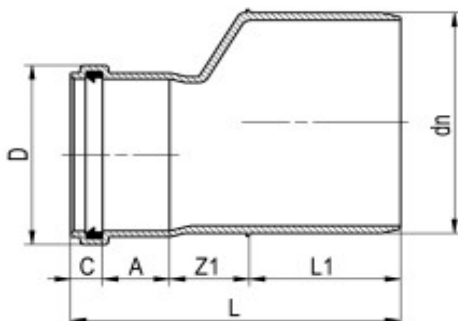

* Pièce façonnée

SN8 (SN12) / S13.3 Couleur caramel

dn mm	dn2 mm	D mm	C mm	A mm	L1 mm	Z1 mm	L mm	Poids kg	Carton P.	Palette P.	Article N°
125	110	129.2	20.0	44.0	82.0	32.0	178.0	0.326	54	216	PPRS125110
160	110	129.2	20.0	44.0	98.0	52.0	214.0	0.566	48	192	PPRS160110
160	125	147.3	23.0	48.0	98.0	46.0	215.0	0.546	32	128	PPRS160125
200	110	129.2	20.0	44.0	117.0	73.0	254.0	0.900	21	84	PPRS200110
200	125	147.3	23.0	48.0	117.0	67.0	255.0	0.910	20	80	PPRS200125
200	160	186.3	29.0	55.0	117.0	53.0	254.0	1.012	18	72	PPRS200160
250	200	230.6	36.0	64.0	144.0	70.0	314.0	1.875	6	24	PPRS250200
315	200	230.6	36.0	64.0	171.0	94.0	378.0	3.393	1	24	PPRS315200
315	250	290.8	48.0	75.0	171.0	92.0	386.0	4.000	1	16	PPRS315250
400	250	290.8	48.0	75.0	209.0	141.0	473.0	6.636	1	9	PPRS400250
*400	315	361.1	57.0	89.0			510.0	7.800			PPRS400315
*500	400	455.3	65.0	108.0			800.0	17.000			PPRS500400
*630	500	714.3	113.0	165.0			950.0	31.000			PPRS630500

Valeurs indicatives, informatives et non contractuelles.