

Wall Collar system sealing joints

Area of use

The Wall Collar system sealing joint is used for tight tubular ducts that pass through aprons or walls. The sealing joint is pressure-tight up to 8 bar and approved by the TÜV; it prevents outer-wall moisture from infiltrating the pipe.

Characteristics

The Wall Collar system sealing joint comes with two special steel strips. The circular collar provided with additional water blockers prevents liquids from infiltrating the shell.

Where the sealing joint is applied to the pipe, and after tightening the special steel strips, small water blockers seal for a water column up to 50 M'.

Assembly procedure

- Clean the pipe surface in case of clogging
- Slide the collar and fix it in the middle of the concrete or in the middle of the shell
- Tighten the clamping bands



Assembly possibilities


The Wall Collar system sealing joint can be applied to almost all pipes. Whether you choose to use pipes in plastic, stone, cast iron or steel, the seal will be reliable. The seal is available from Ø 25 mm to Ø 1'200 mm.

(Tip : Sealing joints are easier to install by soaking them for 10 minutes in hot water.)

On request, Canplast can install the seal directly on the parts in its manufacture workshops whether it is a (canadian well, inspection chamber, etc...)



Dimensions

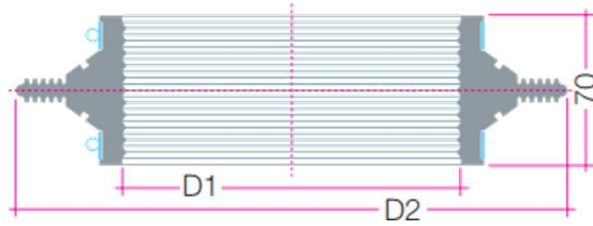

Item N°	Pipe ext. Ø (mm)	Approx. Ø exterior ring D2 (mm)	Clamping range D1 (mm)		Weight (kg)	Sales price (CHF)
			from ext. Ø	to ext. Ø		
JTF0025	25	127	22	25	0.250	46.00
JTF0032	32	127	29	32	0.250	48.00
JTF0040	40	136	38	42	0.260	48.00
JTF0050	50	146	48	53	0.290	48.00
JTF0063	63	158	60	64	0.320	48.00
JTF0075	75	169	71	80	0.360	48.00
JTF0090	90	182	84	92	0.450	58.00
JTF0110	110	203	105	115	0.480	48.00
JTF0125	125	218	120	130	0.510	52.00
JTF0140	140	228	135	147	0.540	58.00
JTF0160	160	252	154	166	0.620	62.00
JTF0200	200	293	195	207	0.700	72.00
JTF0250	250	343	245	260	0.890	78.00
JTF0280	280	373	275	290	0.920	84.00
JTF0315	315	408	310	324	1.070	84.00
JTF0355	355	435	352	365	1.180	98.00
JTF0400	400	480	395	410	1.310	110.00
JTF0450	450	540	442	460	1.900	182.00
JTF0500	500	588	490	515	2.150	190.00
JTF0630	630	711	613	650	2.900	208.00
JTF0710	710	788	690	735	3.000	225.00
JTF0800	800	873	775	830	3.400	245.00
JTF0900	900	968	870	930	4.250	260.00
JTF1000	1'000	1'063	965	1'030	4.450	308.00
JTF1200	1'200	1'253	1'155	1'240	5.750	432.00

