


Tuyaux HDPE SN8, fiche technique

Tuyau en PE-dur (PE80), avec emboîtement et joint

Conformes aux normes : EN 12666 - R 592012 - Qplus 11004

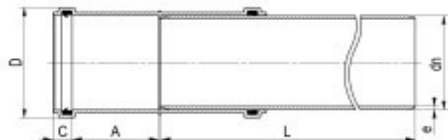

* Selon disponibilité

SN8 / SDR21 / S10 Couleur noir

| dn mm | e mm | D mm | C mm | A mm | L mm | Poids kg/m | Palette m | Article N° |
|----------|---------|---------|---------|---------|---------|---------------|--------------|---------------|
| *110 | 5.3 | 138.2 | 24.0 | 92.5 | 6'000 | 1.890 | 270 | S10PET1106 |
| *125 | 6.0 | 153.6 | 24.0 | 95.5 | 6'000 | 2.430 | 192 | S10PET1256 |
| *160 | 7.7 | 199.4 | 31.0 | 101.0 | 6'000 | 3.990 | 108 | S10PET1606 |
| *200 | 9.6 | 231.9 | 36.5 | 104.0 | 6'000 | 6.190 | 90 | S10PET2006 |
| *250 | 11.9 | 293.0 | 56.0 | 174.5 | 6'000 | 9.740 | 48 | S10PET2506 |
| *315 | 15.0 | 363.6 | 63.0 | 199.0 | 6'000 | 15.460 | 36 | S10PET3156 |
| *400 | 19.1 | 461.2 | 71.0 | 118.0 | 6'000 | 24.600 | 24 | S10PET4006 |

Valeurs indicatives, informatives et non contractuelles.